

# Quasar

Half Cut Mono PERC  
Glass to Backsheet  
MonoFacial - 12BB

## 700W


Efficiency up to  
**>22.55%**



**0~+4.99W**  
Power Tolerance

CS-QUXXX-132 (XXX=670-700)

### Linear Performance Warranty

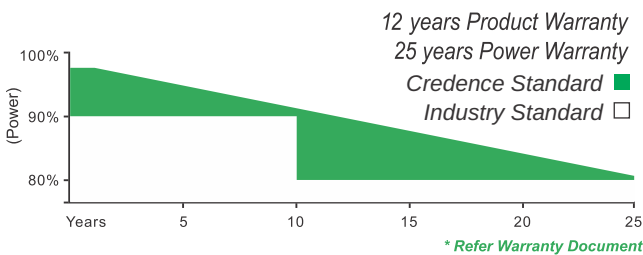

<b>12</b> Year Product Warranty	<b>25</b> Year Linear Power Warranty	<b>2%</b> First-year Degradation	<b>0.55%</b> Annual Degradation of 2-25 Years
------------------------------------	--------------------------------------------	----------------------------------------	-----------------------------------------------------

### Approvals and Certificates

- IEC 61215, IEC 61730, UL 61730, BIS
- IEC 61853-1, IEC 61853-2, IEC 62782
- IEC 61701, IEC 60068-2-68, IEC 62716

\*All certification are under process



MADE IN  
INDIA



Half Cut Cell Design with  
Multi Bus Bar Technology



High Power Generation



Excellent Weak Light  
Performance



Lower LCOE & BOS



Low LID



Better Mechanical Rigidity



Enhanced Mechanical  
Load Capacity



PID Free Guarantee

**ELECTRICAL PARAMETERS (STC\*):**

Model	Voc (V)	Vmp (V)	Imp (A)	Isc (A)	Pmax (W)	Eff (%)
CS-QU670-132	45.40	38.25	17.55	18.65	670.00	21.60
CS-QU675-132	45.55	38.40	17.60	18.70	675.00	21.75
CS-QU680-132	45.65	38.45	17.70	18.80	680.00	21.90
CS-QU685-132	45.80	38.50	17.80	18.85	685.00	22.05
CS-QU690-132	45.85	38.55	17.90	19.05	690.00	22.20
CS-QU695-132	45.90	38.60	18.01	19.15	695.00	22.40
CS-QU700-132	45.95	38.70	18.10	19.25	700.00	22.55

\*STC (Standard Test Conditions): Irradiance 1000W/m<sup>2</sup>, Temperature 25°C, Spectrum at AM 1.5G.

**ELECTRICAL PARAMETERS (NMOT\*):**

Model	Voc (V)	Vmp (V)	Imp (A)	Isc (A)	Pmax (W)	Eff (%)
CS-QU670-132	41.29	34.49	14.10	14.98	486.00	19.60
CS-QU675-132	41.42	34.62	14.14	15.02	489.00	19.70
CS-QU680-132	41.51	34.66	14.22	15.10	493.00	19.85
CS-QU685-132	41.65	34.71	14.30	15.14	496.50	20.00
CS-QU690-132	41.70	34.75	14.38	15.30	500.00	20.15
CS-QU695-132	41.74	34.80	14.46	15.38	503.20	20.25
CS-QU700-132	41.79	34.89	14.54	15.46	507.30	20.40

\*NMOT (Nominal Module Operating Temperature): Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Spectrum at AM 1.5G, Wind speed at 1m/s. (NOCT is similar to NMOT)

**Design Specifications:**

Cell Type	210mm- 12BB Mono PERC Crystalline
Cell Configuration	132 (11 x 6 x 2) Half Cut Cells
Operating Temperature	-40°C to +85°C
Max. System Voltage	1500V DC
Max. Series Fuse Rating	30A
Application Class	A
Safety Class	C
Junction Box Type	Split JB IP68
Output Cable Length	300mm (1400mm upon request)

**Dimensional & Packing Details:**


Dimensions	2384 x 1303 x 35mm
Weight	33.80 kg
Modules/ Pallet	28 Nos
22Ft Truck	224 Nos
40 Ft HQ Container	616 Nos

**Temperature Coefficients:**


Power (Pmax)	-0.273%/°C
Voltage (Voc)	-0.212%/°C
Current (Isc)	+0.036%/°C
NMOT/ NOCT	44±2 °C

The technical data and specifications are mentioned in the data sheet may changed without prior notice due to continuous improvements and innovations in the product. Please contact marketing for the latest updates and data sheet before finalizing the Order. Please be advised that Solar PV modules should be handled and installed by qualified personnel and please Refer Installation, Operation & Maintenance Manual before handling and start installation for safety & installation.


Reference IV Curve Detail:

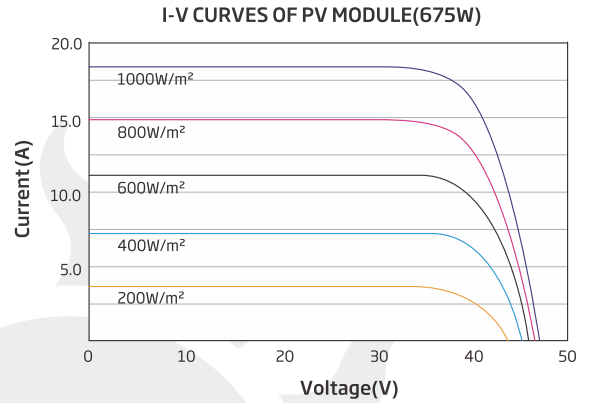

P-V CURVES OF PV MODULE(675 W)

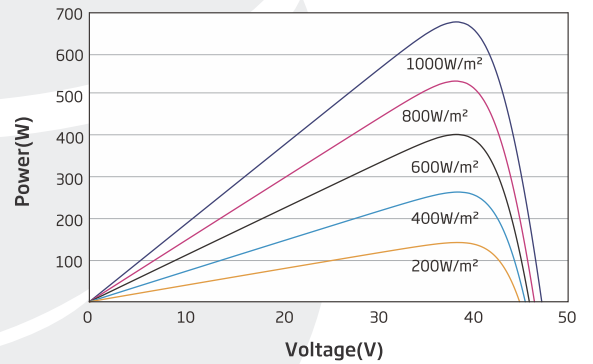

Rear View & Mounting Detail:

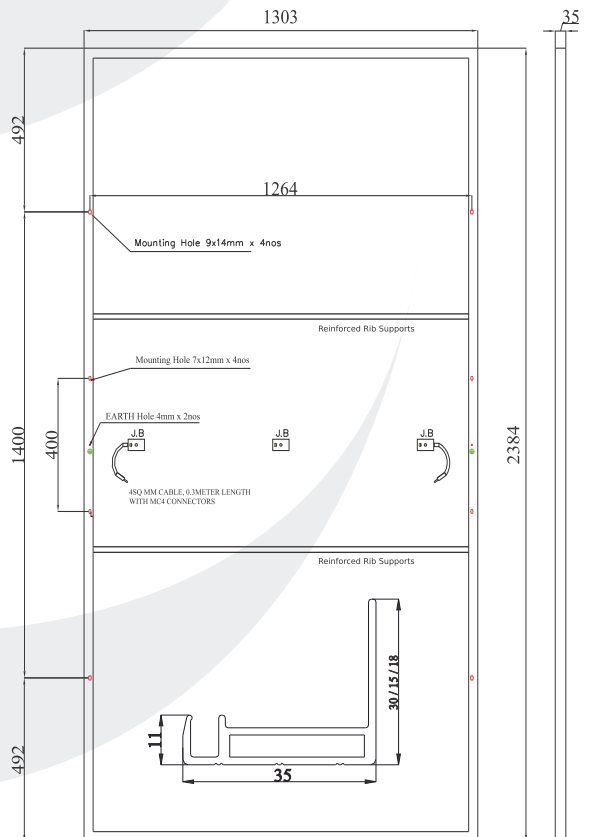

All Dimensions are in mm; Tolerance: ±2mm